

Rubber Trails & Surfaces Canada Ltd.


www.rubbertrailsandsurfaces.ca

815 HWY 336
Upper Musquodoboit
Nova Scotia Canada B0N 2M0
Tel.: (902) 568-2469
Fax: (902) 568-2460
info@rubbertrailsandsurfaces.ca


Tiger Tuff Tiles

Tiger Tuff Tiles are resilient rubber tiles that provide a long life and low maintenance answer to playground safety. The permeable surface of the Tiger Tuff Tile allows water to pass through the product instead of standing on top. Tiger Tuff Tiles are available in 2'x2'x2" and 2'x2'x1" modules.


ASTM F-1292-96 and F-355-95. Colors available are Red, Green, Brown and Black. Transition ramp-up edging are also available making the surface ADA accessible. Ideal for school or backyard play areas.

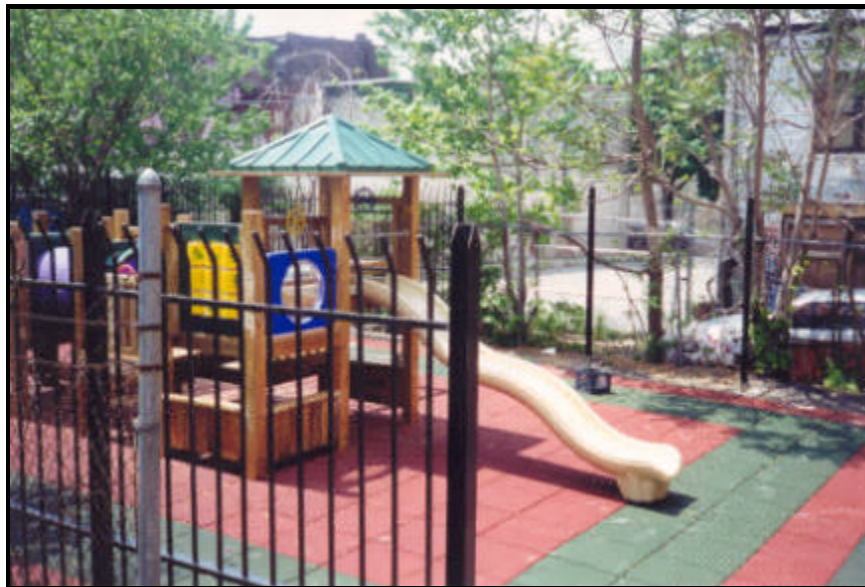

Thickness ("T") Varies Depending On Fall Height Requirements

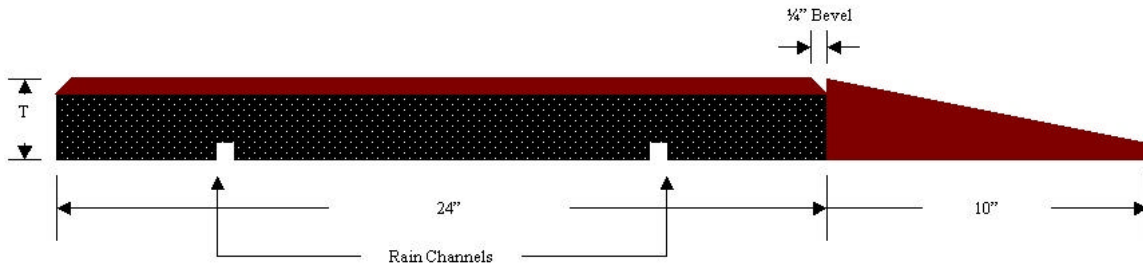

Overview of Tile Laid On Bond

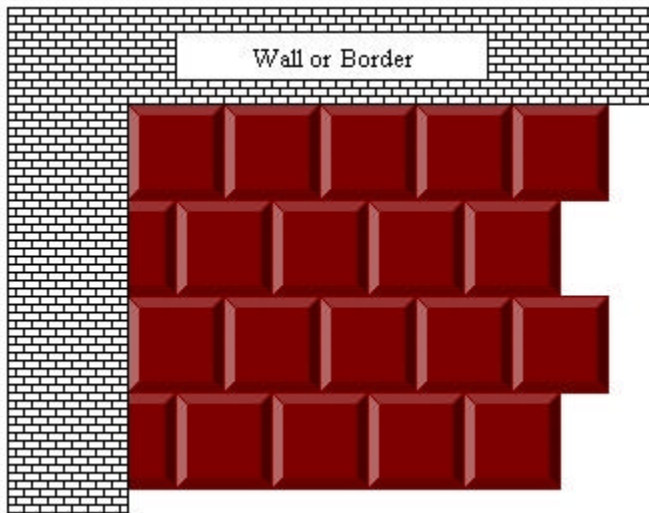

2'x2'x2 1/4" Tile: 30 lbs


2'x2'x1 1/2" Tile: 21 lbs

48"x10"x2 1/4" Ramp: 15 lbs


48"x10"x1 1/2" Ramp: 12 lbs

Colors: Red, Green, Or Black

Tiger Tuff Tile Specifications and Installation Detail

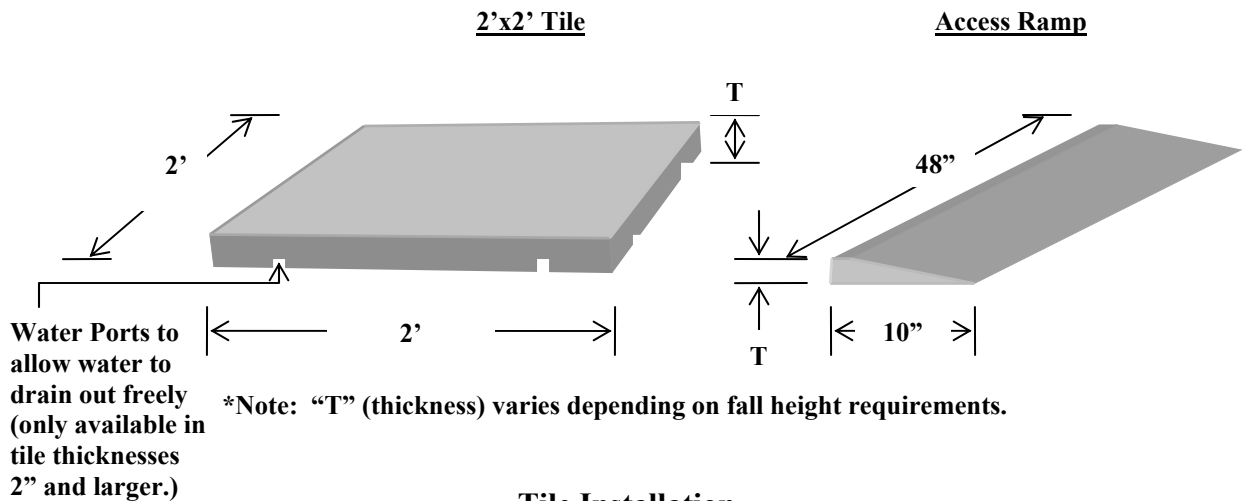

Tile Installation

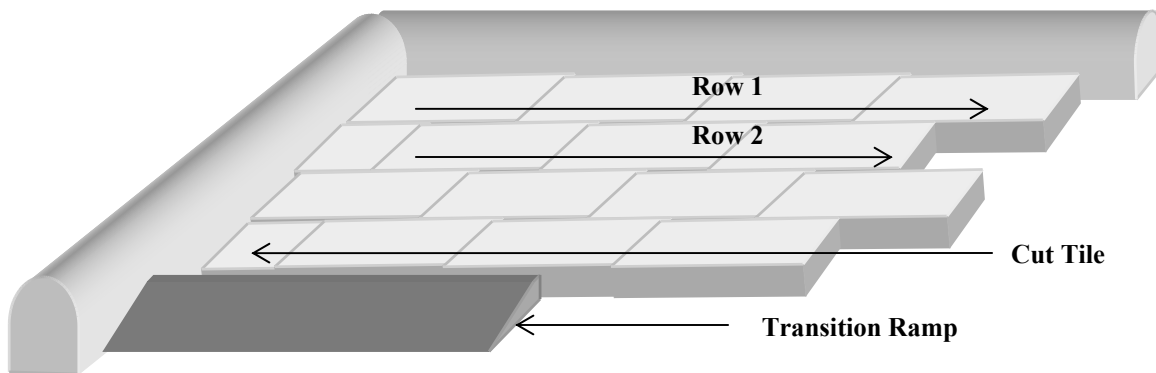

Tile Installation On Bond

1. Begin installation of Row 1 with a full tile
2. After Row 1 is complete, start Row 2 with a full tile. The full tile should be installed @ $\frac{1}{2}$ the width of the first full tile in Row 1.
3. When all full tiles have been installed in Row 2, install the cut tiles.

*Notes: Always work left to right and complete on row at a time.